



156 Epping Road Exeter, NH 03833

800-261-7219

Stock Number: #STOCK KW T280

2026 Kenworth T280

Details:

- 2025 NRC 20TB - 22'
- Fully Galvanized Deck and Subframe
- Lodar Remote
- 10k Winch
- Paccar PX-7
- 300HP
- Allison 2500 RDS
- Full Chassis / Body spec attached

Price: 179,870



NEW ENGLAND TRUCK CENTER
156 EPPING RD
EXETER, New Hampshire 03833
United States of America

Mike

Vehicle Summary

	Unit	Chassis
Model:	T280 Series Conventional	Fr Axle Load (lbs): 10000
Type:	FULL TRUCK	Rr Axle Load (lbs): 20000
Description 1:	T2804X2 RB W	G.C.W. (lbs): 26000
Description 2:		
Intended Serv.:	Application Local Pickup & Delivery: Vehicles which	Road Conditions: Class A (Highway) 90
Commodity:	Auto Transporter	Class B (Hwy/Mtn) 10 Class C (Off-Hwy) 0 Class D (Off-Road) 0
Type:	Body Roll Back Flatbed	Maximum Grade: 6
Length (ft):	22	Wheelbase (in): 232
Height (ft):	12	Overhang (in): 75
Max Laden Weight (lbs):	4000	Fr Axle to BOC (in): 69.5
No. of Trailer Axles:	Trailer 0	Cab to Axle (in): 162.5 Cab to EOF (in): 237.5 Overall Comb. Length (in): 347
Type:	0	Special Req.
Length (ft):	0	U.S. Domestic Registry, 50-state
Height (ft):	0	
Kingpin Inset (in):	0	
Corner Radius (in):	0	
Length (ft):	Restrictions 75	
Width (in):	102	
Height (ft):	13.5	

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

Sales Code	Std/ Opt	Description	\$ List	Weight
Model				
0000280	S	T280 Series Conventional	106,113	9,170
0070075	S	T280 Aero Hood	0	0
0080050	O	CARB Clean Idle Label - PACCAR PX Engines	36	0
0080314	O	EPA Clean Idle Label - PACCAR PX Engines	36	0
0090142	O	T280	0	0
0098429	O	State of Registry: New Hampshire	0	0
Engine & Equipment				
0130124	O	PACCAR PX-7 300 300@2600 660@1400, 2024 With Turbo Exhaust Brake (VGT Brake) N09420 C333 0....Reserve Speed Limit Offset (N09380 C334 0....Maximum Cycle Distance (N202 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (N20 N09220 C402 0....Expiration Distance (N207) N09540 C395 0....Expiration Distance (N209) N09260 C121 68....Max Vehicle Speed In Top Gea N09440 C234 YES...Engine Protection Shtdwn N09460 C231 YES...Gear Down Protection N09580 C133 5.....Idle Shtdwn Time N09680 C233 NO....Idle Shtdwn Override N09480 C132 1400..Max PTO Speed N09300 C128 68....Max Cruise Control Speed N09500 C239 YES...Cruise Control Auto Resume N09520 C238 YES...Auto Engine Brake in Cruise N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold N09560 C225 NO....Enable Idle Shutdown Park Br	2,411	0
1000047	O	CARB Emissions Warranty Engine	0	0
1000151	S	PremierSpec	0	0
1000242	O	Gearing Analysis: Fuel Economy fuel efficiency results.	0	0
1000255	O	Customer's Typical Operating Spd: 68 MPH	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
1000525		RegistrationYear Year of Registration: 2025	0	0
1000684	O	Effective VSL Setting NA	0	0
1000858	O	Engine Idle Shutdown Timer Disabled	0	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1002060	S	Air Compressor: Cummins 18.7 CFM For Cummins And PACCAR PX engines.	0	0
1041399	S	Air Cleaner: MD Composite Engine Mounted	0	0
1105261	S	Fan Hub: Horton On/Off for PX-7 or B6.7N	0	0
1121231	S	Cooling Module: 2.1M MD - Aero Hood 1000 Square Inches	0	0
1247278	S	EXH: Single Can 2024 PX-7 Horizontal Under Rail With Horizontal Tailpipe Below Rail RH Rail Back-of-Cab	0	0
1321102	S	Fuel Filter: PACCAR 2.1M MD for PX-7 or PX-9 Fuel/water separator for 2021 and later engines.	0	0
1321200	S	Run Aid:None *For Fuel Filter	0	0
1321300	S	Start Aid:None *For Fuel Filter	0	0
1504006	O	Block Heater: PACCAR 750 watt 120V for PX-7 and B6.7N. 1000 watt for PX-9 and ISL9 Engines.	26	2
1816160	O	Alternator: 160 amp Brush Type T3	-189	0
1821225	O	Batteries: 2 PACCAR GP31 Threaded Post (1000) 2000 CCA starting.	12	4
1836106	O	Mitsubishi 105P55 12V Starter with Cummins and PX PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	39	0
1900996	O	Jump Start Terminals Under Hood.	71	0
1901017	O	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	105	0
Transmission & Clutch				
2010643	O	Transmission: Allison 2500RDS 6-speed, With PTO drive gear. 6th Generation controls. Includes heat exchanger. Rugged Duty Series for vocational applications. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	3,794	91
2406811	O	Driveline: 3 Dana SPL100a 2 Centerbearings light duty	409	47
2410018	O	Torque Converter Included W/ Allison Transmission.	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
2410153	O	Push Button Shifter Controls, Center Console Mounted for Allison Transmission. 2.1m Medium Duty only.	0	0
2410204	O	Allison Fuel Sense: Delete	0	0
2410244	O	J1939 Park Brake Auto Neutral	0	0
2410310	O	Allison Neutral at Stop	0	0
2429378	O	Customer Installed Transmission PTO In the LH Mounted position (8 o'clock) for Allison 3000 & 4000 transmissions.	0	0

Front Axle & Equipment

2501010	O	Dana Spicer E-1002IL Front Axle rated 10K 3-1/2in. drop. Use w/ air brakes only.	265	0
2621310	O	Front Brakes: 14.6K Bendix ES S-Cam 16.5x5 in.	-152	-62
2659047	O	Front Dustshield: for Drum Brakes: All Front Axles.	58	6
2690002	O	Front Brake Drums: 14.6K 16.5x5 in. cast.	418	0
2701300	O	Front Hub: Aluminum Hub Pilot 13,200 lbs. 10-Bolt, 11-1/4 in. bolt circle .	47	0
2741970	S	ConMet PreSet Plus Hub Package; Front Axle.	0	0
2750001	S	Hubcap: Front Vented.	0	0
2765001	S	Front Auto Slack Adjuster for Drum Brakes.	0	0
2882001	S	Front Springs: Mono-leaf 10K W/ Shock Absorbers With maintenance-free elastomer spring pin bushings.	0	0
2895223	S	Single Power Steering Gear: 13.2K for Air Brakes.	0	0
2900055	O	5 mm Front Suspension Spacer Block	0	0
2900612	O	Threaded Front Spring Bushings In Place of elastomeric.	62	0

Rear Axle & Equipment

3032205	O	Single Meritor MS21-14x4 Rear Axle 20K	877	128
3200463	O	Rear Axle Ratio - 4.63.	0	0
3330004	S	Single Rear Brakes 16-1/2x7 in. Bendix ES- extended service S-cam.	0	0
3392007	S	Single Rear Brake Drums: Cast S-Cam Single For use with 15x8.625", 16.5X7" or 16.5X8.625" brake.	0	0
3401010	O	Single Rear Hubs: Aluminum Hub Pilot 23K; 11.25" bolt circle. Requires "R" series outer ends.	134	-26
3441971	S	ConMet PreSet Plus Hub Package; Single Rear Axle.	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
3465001	S	Single Rear Axle Automatic Slack Adjusters. For use with drum brakes.	0	0
3485007	O	Spring Brake: 3030 Long Stroke Single 3 in. travel. For drum brakes. Helps keep brakes in adjustment longer.	10	4
3490047	O	Dustshields for Drum Brakes: All Rear Axles.	112	11
3495226	S	Bendix 4S/4M Anti-Lock Brake System.	0	0
3511080	O	Meritor Driver Controlled Differential Lock for single rear axle.	872	0
3630021	O	Rear suspension: single Kenworth Airlglide 210L 21K. 6.5 in. ride height w/single leveling valve. Includes air suspension dump valve.	1,353	29
Tires & Wheels				
4038663	O	Front tires: Goodyear Endurance RSA 255/70R22.5 16PR. 36.7in. Diameter, all positions, 17.3 SLR.	191	0
4238742	O	Rear tires:Goodyear Fuel Max RTD 255/70R22.5 16PR	436	-80
4900004	O	Rear Tire Quantity: 4	0	0
5043550	O	Front Wheel: Alcoa ULA18 22.5x8.25 MagnaForce aluminum alloy, hub-pilot mount. 7400lb maximum rating. Air Disc Brake compatible. High polish.	407	-51
5243550	O	Rear Wheel: Alcoa ULA18 22.5x8.25 MagnaForce aluminum alloy, hub-pilot mount. 7400lb maximum rating. Air Disc Brake compatible. High polish.	814	-102
5850040	O	Wheelguards: All Axles.	157	2
5859010	O	Single Front Axle: 2 wheels Dura-Bright Mirror Polish Dura-Bright outboard surface of aluminum wheels.	238	0
5859011	O	Single Rear Axle Wheels: 2 Wheels Dura-Bright Mirror Polish. Dura-Bright outboard surface of outer dual or single aluminum wheels.	357	0
5900004	O	Rear Wheel/Rim Quantity: 4	0	0
Frame & Equipment				
6054410	O	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to 309 in. to 380 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80 cu.in., RBM is 1,776,000 in.-lbs per rail. 120,000 PSI yield. Heat treated. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	666	284
6308715	O	Bumper: Aerodynamic Chrome Steel. Requires a bumper setting code.	1,094	68

Sales Code	Std/ Opt	Description	\$ List	Weight
6319040	S	40 in. Bumper Setting. Requires a Bumper Code.	0	0
6321010	S	Front Tow Loops: Two	0	0
6391201	O	Custom Frame Layout: One Chassis CFL A/D: LOCATE AIR DRYER INSIDE FRAME RAIL CFL C/M: 129962	1,380	0
6404421	O	Battery Box: Steel Parallel Module under W/Step, polished aluminum cover. Use with 2 or 3 batteries. Up to 2 air tanks may be mounted to bottom of box. Batteries will be oriented perpendicular to the frame rail in a single row.	408	9
6409210	O	Rubber Battery Pad in Bottom of Battery Box. For cantilever-style or between the rails battery boxes.	12	2
6409902	S	Battery Box Location: RH Side.	89	0
6490138	S	Stamped Steel Intermediate/ Fill-in Crossmember.	0	0
6490434	O	Heavy-Duty 5-Piece Rear Cab Support, Bolted assembly. Huck fastened to frame.	57	15
6679021	O	Class 6 26K GVWR, for Air Brakes Only. Requires GAWR front 10K, GAWR rear 20K; front axle 10K, front spring 10K, rear axle 20K. Maximum rear suspension is 23K.	0	0
6679864	O	Final End-of-Frame Cut-Off Dimension Will be modified to greater than or equal to 75 in.	0	0
6742009	S	Square End-of-Frame W/O Crossmember; Non-Towing.	0	0
Fuel Tanks & Equip				
7140070	O	70 US Gallon D-Shape Rectangular Aluminum Under fuel tank, replace. With non-slip step.	93	0
7722170	S	Small DEF Tank, 5.5 Gallons.	0	0
7839006	O	Polished Fuel Tank Steps.	29	0
7840015	O	Polish Only One Aluminum Tank.	142	0
7840038	O	Polished Cover for 1 DEF Tank Any Size.	241	3
7889061	O	Polished Stainless Steel Tank Straps for 1 Tank.	95	0
7889208	O	DEF to fuel fill ratio between 1.25:1 and 2:1.	0	0
7889614	O	DEF Tank Location is LH BOC. For 2.1M Medium-Duty	0	0
7920070	O	Location: 70 gal fuel tank LH under cab	0	0
Cab & Equipment				
8024311	S	Cab: Stamped Aluminum with Curved Windshield LED markers. Requires separate roof code.	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
8090155	O	Hood: Med Aero w/ Chrome Crown	95	0
8108002	O	Fine Particulate Filter for Cabin Air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	35	0
8108011	S	Cab HVAC - Day Cab and 40 In. Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
8201047	O	Kenworth Smartwheel: 18 In. Non-Leather With Integrated Radio and Cruise Controls.	116	0
8201200	S	Adjustable Telescoping Tilt Steering Column.	0	0
8203060	O	5 Sets of Keys. Replaces Standard 2 Sets of Keys.	34	0
8205177	O	Dash Switch:1st Allison-Mounted PTO. Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	167	0
8205291	O	Info for C/I PTO: Muncie 6 Bolt	0	0
8208497	O	Four Spare Switches: Wired to Power.	79	0
8222400	O	Gauge: DD Virtual Gauge - Air Suspension Pressure 1	72	0
8222409	O	Gauge: DD Virtual Gauge - Air Filter Restriction	0	0
8222413	O	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0	0
8222414	O	Gauge: DD Virtual Gauge - Engine Percent Torque	0	0
8222418	O	Gauge: DD Virtual Gauge - Engine Hours Instrument Cluster	0	0
8222419	O	Gauge: DD Virtual Gauge - Volts Instrument Cluster	0	0
8282024	S	Main Instrument Package: 7" Digital Display Cluster. Includes Physical (Analog): Speedometer, Tachometer, Oil Pressure, and Coolant Temp; and Digital: Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Volts Telltale, OAT and Primary Air Pressure, Secondary Air Pressure, and Air Application for air brake trucks.	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
8282108	O	Modular Dash Options: RH Dash Storage Unit With two shelves. Reduces total gauge count; HD by 6 and MD by 4.	46	0
8330591	S	Interior Trim Package: 2.1M MD Gray Foam Backing/Cloth Headliner W/Gray Sunvisor & Seat Color Three Underdash Center Console Cupholders (Two If Allison Transmission Is Selected).	0	0
8410122	O	Driver Seat: KW Air Seat HB Vinyl w/ Dual Armrests/Susp Cover	191	0
8478051	S	Rider Seat: KW Toolbox 2-Man Bench Vinyl	0	0
8490161	O	Seat Color: Black Replacing Standard Gray	0	0
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	394	0
8698965	O	Speaker Package For Cab: (2) Speakers B-Pillar	51	0
8700161	O	Footwell Light: Red Lens & Switch	12	0
8700196	S	Turn Signal: Self-Cancelling	0	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0	0
8700601	S	Global Telematics Unit	0	0
8800272	O	Grabhandle: RH, Exterior, Side of Cab - Ergonomic Grab Handle Mounted To The Right Hand Exterior Of The Cab For Entry and Exit.	122	3
8800372	O	Grabhandle: LH, Exterior, Side of Cab - Ergonomic Grab Handle Mounted To The Left Hand Exterior Of The Cab For Entry and Exit.	119	3
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0	0
8832113	S	Kenworth Daylite Door With Standard LH/RH electric door locks and LH/RH electric window controls.	0	0
8841411	O	Single Air Horn Under Cab.	100	0
8850139	S	Look-Down, Pass. Door, Black 11x6	0	0
8850841	O	Mirror Shell: Dual Aero Chrome	148	0
8860852	O	Mirror: Dual KW Aero Rear View Motor, heated with Integral CX	66	0
8871446	S	Rear Cab Stationary Window 19in x 36in	0	0
8890101	S	One-Piece Bonded-In Windshield With Curved Glass. Standard.	0	0
8890135	O	Exterior Stainless Steel Sunvisor.	761	11

Sales Code	Std/ Opt	Description	\$ List	Weight
8890881	S	Direct Mount, Rubber Isolated Cab Suspension.	0	0
8891009	O	Thermal/Sound Insulation Package	265	0
8891011	O	Roof: Raised Profile, Stamped Aluminum w/ Additional Head Room & Interior Overhead Storage	160	0
Lights & Instruments				
9010803	S	Headlamps: Single Halogen Complex Reflector w/ Turn Indicator, Reflector and DRL. Fender Mtd.	0	0
9022130	O	Marker Lights: Five Rectangular LED. Chrome housing. For use with raised roof only. Required with exterior sunvisor.	55	0
9030052	S	LED Stop, Turn, Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
9042545	O	KW Fog Lights (2) Recessed In Bumper	275	2
9090180	O	Backup Alarm: Tail Light Bracket Mounted Variable self-adjusting 82-102 DBA.	135	0
9090312	O	Body Builder Lighting Harness Coiled End Of Frame For Additional Customer Installed Exterior Lighting. Harness Includes Circuits for Additional Customer Installed Tail Lamps, Turn Lamps, Stop Lamps, and Marker Lamps.	154	0
9090849	O	Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.	43	0
Air Equipment				
9101218	S	Air Dryer: Bendix AD-HF Puraguard Heated	0	0
9108001	S	Moisture Ejection Valve W/ Pull Cable Drain.	0	0
9140020	S	Nylon Air Tubing in Frame & Cab, Excluding Hoses subject to excessive heat or flexing.	0	0
9140252	O	Locate Air Dryer Inside LH Rail BOC. This code requires the use of a custom frame layout code.	0	0
9140288	O	Air Tanks: Clear of Transmission Area. This code requires the use of a custom frame layout code.	0	0
Extended Warranty				
9200007	S	Base Warranty - PACCAR PX-7 Engine 36 months / Unlimited miles & km / Unlimited hours.	0	0
9200022	S	Base Warranty - Standard Service Medium Duty 12 months / Unlimited miles & km	0	0
9212661	O	TruckTech+ RD - 5YR Sub PACCAR PX Engines	799	0
9220007	O	Base Warranty: Emissions (CARB Operation) 5YR/150K MI - PX-7 Engine	1,224	0
Miscellaneous				
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
9490206	O	Warning Triangle Reflector Kit: Shipped Loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	58	4
9490404	O	One 5 lb. Dry Chemical Type Fire Extinguisher mounted outboard of driver seat. Class ABC.	126	11
9490645	O	Zinc Phosphate Frame Rail Paint Processing. Requires frame rail code. Code is for 1 pair of rails.	314	0
9491652	S	EMUX Architecture	0	0

Promotions

Paint

9700000	O	Paint Color Number(s). N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	0	0
9943004	S	Bumper Unpainted	0	0
9943048	O	Day Cab Bulk Paint	0	0
9943050	S	Day Cab Standard Paint	0	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0	0
9965510	S	Base Coat/ Clear Coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Special Requirements

Special Requirement 1 0098025
Special Requirement 2
Special Requirement 3
Special Requirement 4

Order Comments

Total List Price (W/O Freight & Warranty & Surcharges)	\$128,018
Marketing and Service Support Fee	\$770
Prepaid Freight	\$3,625
Total Surcharge/Options Not Subject To Discount	\$2,023
Total Weight (lbs)	9,588

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER


While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Shipping Destinations

Intermediate Destination: PDI

Final Destinations	Quantity
New England Wrecker Sales, Inc. 156 Epping Rd. Exeter, New Hampshire 03833	1


HORIZONTAL DIMENSIONS

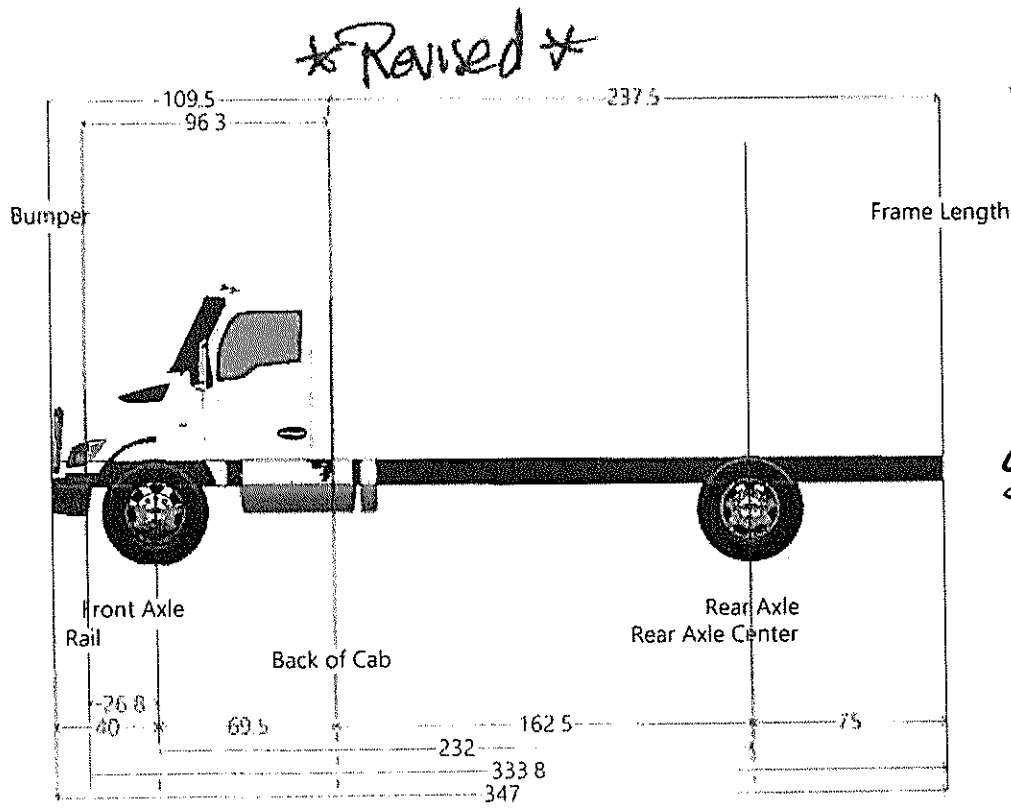

2026
T280
4 Dash
Switches
Add'l

Dimension	Measurement	Start	End
Axle Spacing	0	232	232
Bumper to Back of Cab	109.5	40	69.5
Bumper to Front Axle	40.0	40	0
Bumper to Front Frame	13.2	40	26.8
Cab to End of Frame	237.5	69.5	307
Cab to Rear Axle	162.5	69.5	232
Effective Bumper to Back Of Cab	109.5	40	69.5
Frame Length	333.8	26.8	307
Front Axle to Back of Cab	69.5	0	69.5
Front of Frame to Axle	26.8	26.8	0
Load Space	237.5	69.5	307
Overall Length	347.0	40	307
Overhang	75.0	232	307
Pusher Offset #1	0.0	232	232
Pusher Offset #2	0.0	232	232
Pusher Offset #3	0.0	232	232
Tag Offset	0.0	232	232
Wheelbase	232	0	232

FRAME LAYOUT

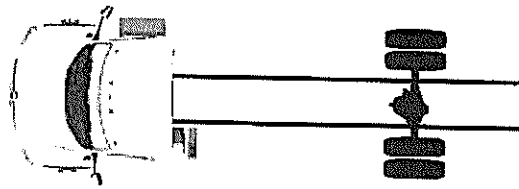

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

Selected Options (Worksheet 21)

Sales Code	Description	Length	Side
70-1010	70 US Gallon D Shape Rectangular Aluminum Under	95.3	Left
70-1011	Small Diff Tank, 5.5 Gallons	6.4	Left
70-1012	Battery Box, Steel, Power Module under W Step	33	Right

**156 Epping Rd.
Exeter, NH 03833
(603)778-8158**

www.netruckcenter.com

Date	Estimate #
12/10/2024	KWT28020TB

Name / Address
New England Truck Center 156 Epping Road Exeter, NH 03833

OP#	PO #	Rep
KWT28020TB	STOCK	

Item	Description	Qty	Total
Chassis	2026 KENWORTH T280 VIN# TBD	1	112,522.00
Bodies	2025 20TB-22' SERIAL #TBD	1	47,245.00
C-NC112	FULLY CONFIGURABLE EQUIPMENT	1	0.00
C-NC19	20 000TB	1	0.00
C-2022	22'-20 000-TB	1	0.00
C-NC46	COMPLETE EQUIPMENT	1	0.00
C-D414	4 CHAIN SLOTS PER SIDE (16 TOTAL FOR 21', 22', 23', 24')	1	0.00
C-D	"3/16" CHECKER PLATE DECK (STANDARD)	1	0.00
C-PGAL-1	DECK GALVANIZED (OPTION FOR 18'-23' DECKS)	1	0.00
C-C1	FLAT TOP DECK, WITH REMOVABLE RAILS	1	0.00
C-B3	3" HIGH X 9" SPACING (OPTION FOR 20 000-TB)	1	0.00
C-L16	5 MARKER LIGHTS PER SIDE	1	0.00
C-T02	RAMSEY HDP 10,000 LBS WITH 7/16" X 75' WIRE ROPE (OPTION FOR 10 000-TB AND 20 000-TB)	1	0.00
C-T15	WINCH AIR FREE SPOOL ON LEFT HAND SIDE	1	0.00
C-NC30	75' WIRE ROPE	1	0.00
C-CR01	SWIVEL HOOK	1	0.00
C-NC24	SINGLE AXLE	1	0.00
C-12V	12V WIRING	1	0.00
C-NC44	MEDIUM DUTY STINGER AND WHEEL LIFT (STANDARD FOR 20 000-TB) (3X3 T-BAR)	1	0.00
C-G20	GALVANIZED SUB-FRAME AND BUMPER	1	0.00
C-NC17	CLEAR MARKER LIGHT	1	0.00
C-L118	8 X 4 1/2" LIGHT (6 RED (STOP-FLASH) / 2 BACKUPS) - ON BUMPER	1	0.00
C-NC11	LEVER CONTROL STANDARDS	1	0.00
C-INCL	WHEEL LIFT SYSTEM (OPTION INCLUDES 3X3 T-BAR)	1	0.00
C-S052	STAINLESS ON REAR BUMPER	1	0.00
C-G011	STABILIZER GRIP (20,000) (3X3)	1	0.00
C-L112-1	2 LED WORK LIGHTS ON TOP OF THE REAR BUMPER	1	0.00
C-B06	HITCH RECEIVER ASSEMBLY 10-20 000LBS (2"X2")	1	0.00
Total			

Date	Estimate #
12/10/2024	KWT28020TB

OP#	PO #	Rep
KWT28020TB	STOCK	

Signature

156 Epping Rd.
Exeter, NH 03833
(603)778-8158
www.netruckcenter.com

Date	Estimate #
12/10/2024	KWT28020TB

Name / Address
New England Truck Center 156 Epping Road Exeter, NH 03833

OP#	PO #	Rep
KWT28020TB	STOCK	

Item	Description	Qty	Total
	PRICING SUBJECT TO CHANGE, WILL BE FINANLIZED OUT CLOSER TO BUILD TIMELINE.		
		Total	\$179,870.68

ONCE THE BUYER ACCEPTS THIS ORDER, THE BUYER'S DEPOSIT IS NOT REFUNDABLE UNLESS THE BUYER CANNOT TAKE DELIVERY OF SAID VEHICLE(S) FOR A REASON BEYOND THE BUYER'S CONROL. IN THAT EVENT, THE DEALER MAY, BUT WILL NOT BE REQUIRED TO, RETURN THE DEPOSIT TO THE BUYER, LESS ANY EXPENSES WHICH THE DEALER HAS INCURRED IN ACCEPTING AND PROCESSING THIS ORDER. THE BUYER'S FAILURE TO OBTAIN FINANCING BEFORE SCHEDULED DELIVERY IS NOT A REASON BEYOND THE BUYER'S CONTROL. THE BUYER WILL ALSO BE SUBJECT TO ANY PRICE INCREASES THAT ARE RECEIVED BY THE DEALER PERTAINING TO THE CHASSIS OR BODY. BY SIGNING THIS THE BUYER ACKNOWLEDGES HAVING READ AND AGREEING TO THESE TERMS AND CONDITIONS.

Signature _____



Terms & Conditions

- Once the buyer accepts this order, the buyer's deposit is not refundable unless the buyer cannot take delivery of the said vehicle(s) for a reason beyond the buyer's control. In that event, the dealer may, but will not be required to return the deposit to the buyer, less any expenses which the dealer has incurred in accepting and processing this order. The buyer's failure to obtain financing before scheduled delivery is not a reason beyond the buyer's control.
- The buyer will be subject to any price increase and or surcharge that are received by the dealer pertaining to the chassis or body.
- The buyer will be subject to any price increase on raw materials / parts that are incurred from the time of placing the order to the actual time of build and delivery of the unit(s).
- By signing this the buyer acknowledges having read and agreeing to these terms and conditions.

Date: _____

Signature of Purchaser: _____

Opp# _____ Chassis: _____ Body: _____

NETC Representative: _____

"Everything Truck"

156 Epping Road Exeter **NH** 03833 +1 603 778 8158

www.NEtruckcenter.com